




ASAHI FORGE OF AMERICA BEARING CORP.

INA PASE50-N bearing units

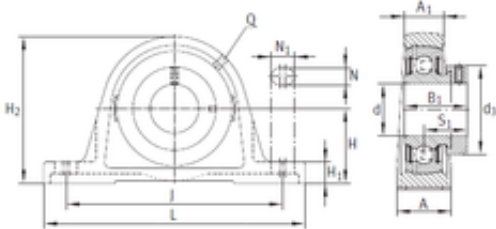

PASE50-N Bearing 2D drawings and 3D CAD models

Bearing No. PASE50-N

Bore Diameter	50 mm
d	50 mm
S1	32,8 mm
Thread (Q)	Rp1/8
d3	69 mm
A	54 mm
A1	34 mm
B1	43,8 mm
H	57,2 mm
H1	21,5 mm
H2	115 mm
J	158 mm
L	200 mm
N	18 mm
N1	23 mm
Weight	2,59 Kg
Basic dynamic load rating (C)	35 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	2.958
EAN	4012802838398
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



ASAHI FORGE OF AMERICA BEARING CORP.

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GRAE50NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Spherical Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 50MM Bore; 57.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 151.5MM Minimum Bolt Spacing; 163.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip Co
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	PASE50N
Weight / LBS	7.056
Base to Center Height	2.252 Inch 57.2 Millimeter
Bolt Spacing Maximum	6.437 Inch 163.5Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Length Thru Bore	1.72 Inch 43.7 Millimeter
Bore	1.969 Inch 50 Millimeter



ASAHI FORGE OF AMERICA BEARING CORP.

Nominal Bolt Center to Center	6.3 Inch 160 Millimeter
Bolt Spacing Minimum	5.965 Inch 151.5 Millimeter